

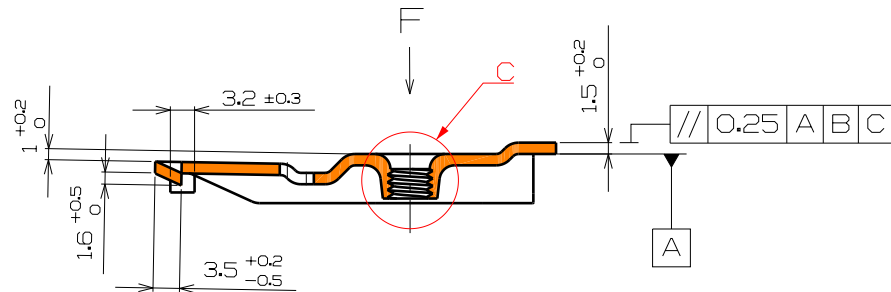


Section D-D

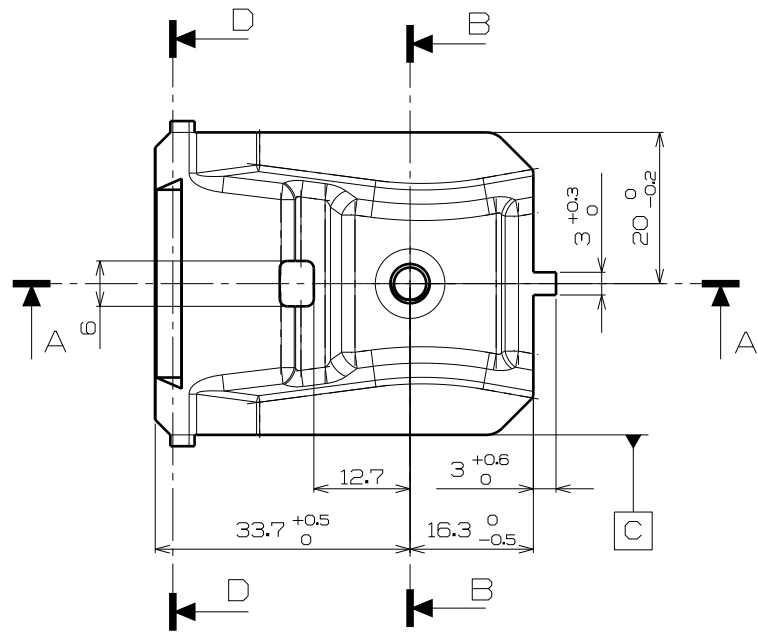



Section A-A

THREAD OF TAPPED COLLAR
MUST RESIST TORQUE T=10Nm

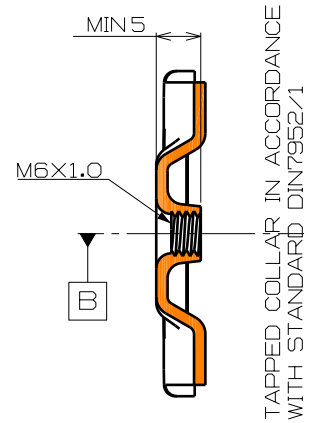

Section B-B

F EXTRACTION FORCE MIN 2100N
(AS SHOWN IN SEC A-A ARROW F)

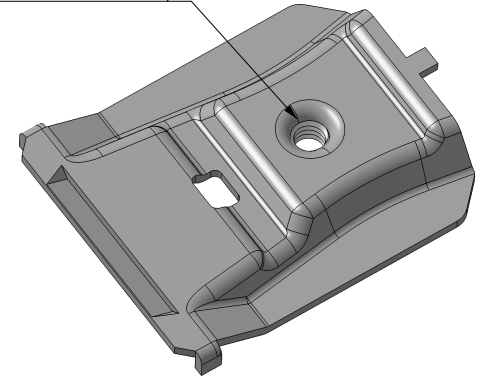

Detail C
Scale 2:1

NOTES & SPECIFICATIONS :

1. MATH DATA IS MASTER
2. ALL DIMENSIONS IN mm
3. UNSPECIFIED RADII: R0.5 MAX.
4. UNSPECIFIED DRAFT: 1.5° MAX.
5. PART MUST BE FREE FROM SHARP EDGES, OILS AND SURFACE CONTAMINATES WHICH MIGHT BE DETRIMENTAL TO SATISFACTORY ASSEMBLY, SAFE HANDLING, OR FUNCTION OF PART.
6. PART MUST BE SUFFICIENTLY PROTECTED AGAINST CORROSION DURING SHIPPING AND STORAGE.
7. NO SHARP CORNERS ALLOWED.
8. ALTERNATIVE MATERIAL: 1.6mm THICK STEEL